


↓	Model	K 800	
	Code Production	GH50NTPADD	
Interface :			
↕	Overall Dimension (Width-Depth-Height) *open	<i>mm</i>	724x818x1529(2010*)
	Packaging Dimension (WxDxH)	<i>mm</i>	760x840x1520
	Gross weight	<i>Kg</i>	120
	Net weight	<i>Kg</i>	110
	Volume	<i>mc</i>	0,97
□	Rack size	<i>mm</i>	500x500
	Max door /hood opening	<i>mm</i>	450
	Max glasses/plate Height	<i>mm</i>	425/440
	General construction		double skin
	Door/hood Construction		single skin
↘	Tank construction		deep drawn
	Tank volume	<i>liter</i>	20
	Tank heating element	<i>W</i>	2500
	Tank surface strainers		yes -composite
⊞	Wash pump type		double flow
	Wash pump power	<i>W</i>	700
	Wash temperature	<i>°C</i>	60
↘	Boiler type		pressurized
	Boiler volume	<i>liter</i>	6
	Back-flow system		valve
	Boiler heating element	<i>W</i>	8000
⊞	Rinse booster pump		no
	Rinse booster pump power	<i>W</i>	-
	Rinse temperature	<i>°C</i>	80
	Rinse water consumption	<i>Liter /rack</i>	2,1
	Optimal external water pressure	<i>bar</i>	2 - 4
⊞	Drain system		overflow
	Drain pump		optional
▶	Rinse aid dispenser		yes
	Detergent dispenser		yes
⚙️	Wash cycle	<i>sec</i>	60 - 120 - 180 - continuous
	Water softner	<i>Continuous type</i>	no
⚡	Electric Power	<i>W</i>	8700
	Electric Connection	<i>V - ph - Hz</i>	400V 3N 50Hz
	Fuse	<i>A</i>	16
	Plates racks	<i>Nr1</i>	780131
▶	Flat Rack	<i>Nr1</i>	780132
	Cutterly Rack	<i>Nr1</i>	780139
	Electric cable		yes
	Drain hose		yes
	Fill hose		yes

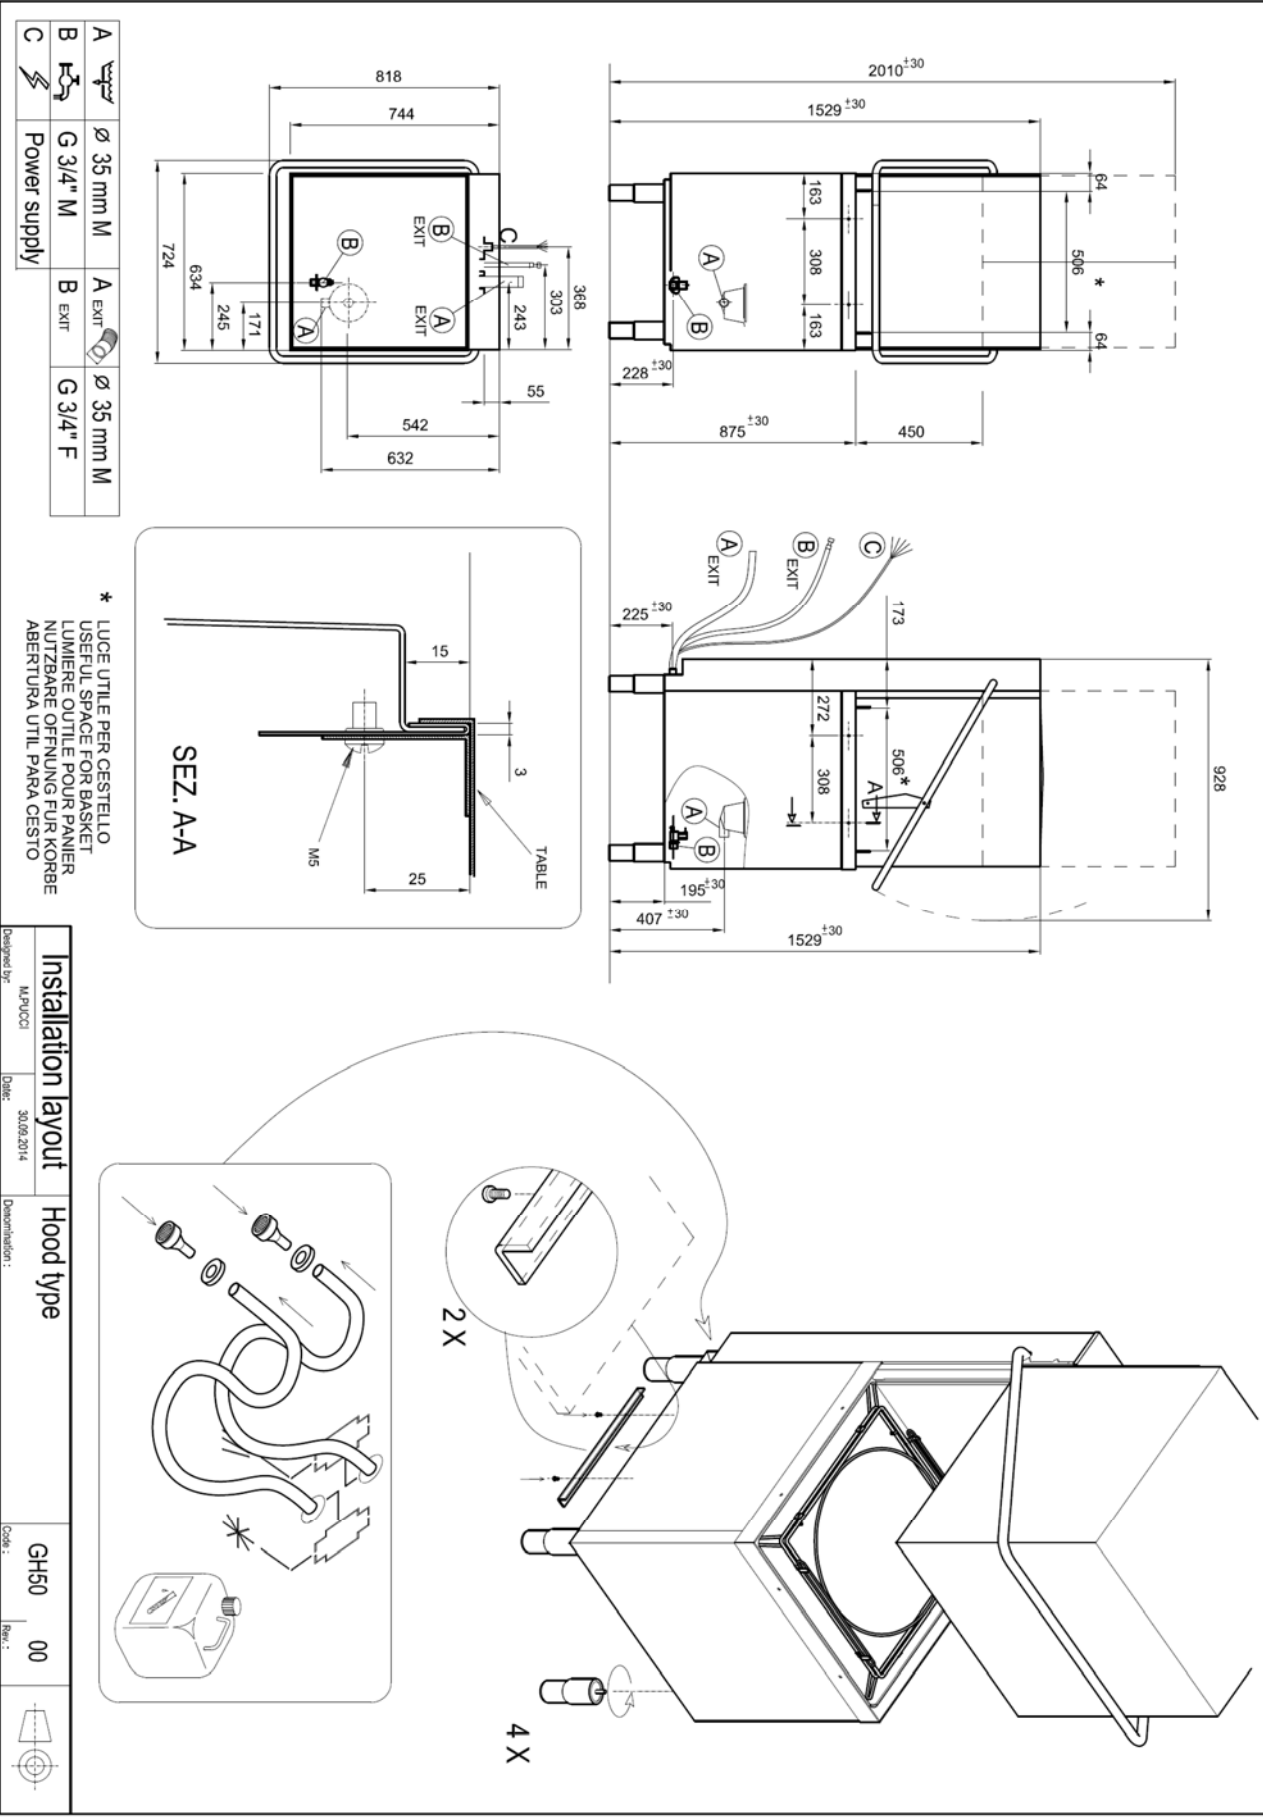

A	⚡	ø 35 mm M	A	EXIT	ø 35 mm M
B	EXIT	G 3/4" M	B	EXIT	G 3/4" F
C	⚡	Power supply			

* LUCE UTILE PER CESTELLO
 USEFUL SPACE FOR BASKET
 LUMIERE UTILE POUR PANIER
 NUTZBARER OFFENUNG FÜR KORBE
 ABERTURA UTIL PARA CESTO

Designed by:	M.P.UCCI	Date:	30/06/2014	Dimension:		Code:	GH50	Rev.:	00
Installation layout		Hood type							

